

## /// 370-790 FEEDER 370-1280 FEEDER

For banner formats up to 790-1280 mm length:

BDT's 370-790/1280 FEEDER is designed specifically to address the current and future challenges of the digital print and finishing industry by specifically targeting the capability for handling a greater range of formats, grammages and media types.

Using BDT's Tornado Technology, a significant enhancement of the overall productivity can be achieved due to the fully automated media handling process with no manual adjustments and less machine down times.



## /// KEY FEATURES

- Purely digital
- Ease of use - no manual adjustments
- Highest productivity - lowest down time rate
- Flexibility - Most difficult print jobs
- Media format range - banner feeding focus
- Low maintenance costs - No compressors or valves
- Low operating costs - Load, Press and Go
- Low service costs - Easy Plug-and-Play Technology

## /// We move media



# /// MEDIA & TECHNICAL DATA

## Graphics / Publishing

- Coated
- Uncoated
- Offset
- Specialty
- Label Stock
- ...

## Packaging


- Paperboard
- C1S, C2S
- Recycled
- Microfluted
- ...

## Post-Press

- Hot melt coated print-outs
- UV-coated print-outs
- Embossed card stocks
- Spot varnished prints
- ...

## Industrial / Others

- Plastic foils
- Synthetics
- ...

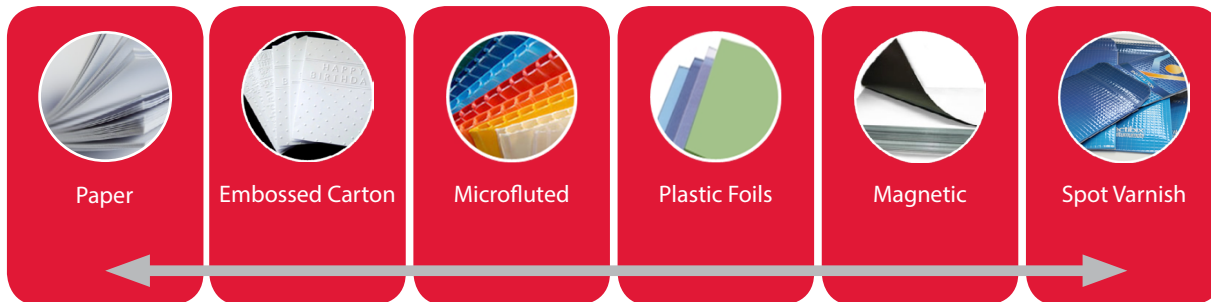

		370-790 FEEDER		370-1280 FEEDER	
Product dimensions	Length x width x height	(1300 x 900 x 975) mm (51.2 x 35.4 x 38.4)"		(1688 x 1286 x 950) mm (66.4 x 50.6 x 37.4)"	
Product weight		400 kg	881.9 lb	880 kg	1940 lb
Transport speed		up to 3,0 m/s		9.8'/s	
Media	Media format	max. (364 x 790) mm	(14.3 x 30.3)"	(364x1280) mm (14,3 x 50,3)"	
		min. (210 x 210) mm	(8.2 x 8.2)"	(210x210) mm (8.2 x 8.2)"	
	Media stack height	500mm/19,7"		max. 500mm/19,7" / max. 150kg/331lb	
	Throughput	A4:	18 000 sheets/h (100 gsm)		
	Grammage	max.	450 gsm	166 lb cover	
			60 gsm	16 lb bond	
Media thickness	up to	600 microns			
Electrical requirements	Input voltage	90 - 260 V   Single Phase		110 - 240 V   Single Phase	
	Frequency	50 / 60 Hz			
	Input current	max. 6,3 A AC   110 V max. 3,0 A AC   290 V		max. 7,3 A AC   110 V max. 3,5 A AC   230 V	
	Back up fuse	16 A			

As a result of BDT's continual product development program, we reserve the right to make changes to the product and its performance and specifications.



# /// FEATURES

## /// STANDARD

- Patented Tornado Suction and Side Aeration Technology
- Multiple job modes:  
Continuous feed / Single sheet test mode / Batch feed
- Dynamic gap control
- Control, service and diagnostic features
- Cart and frame design provides a maximum in flexibility and productivity
- Highest level of ergonomics by offline levelling system of the cart
- Connective emergency stop interface
- Feeder Control Options:           digital I/O interface  
  TCP/IP  
  HMI
- CE certified
- Touchscreen HM Interface and ready-to-go media parameter setups
- Double sheet detection

## /// OPTIONAL

- Customized ID/Skin parts
- Customized smart bridge module to fit eject height of host machine
- Additional Regulatory requirements on Request

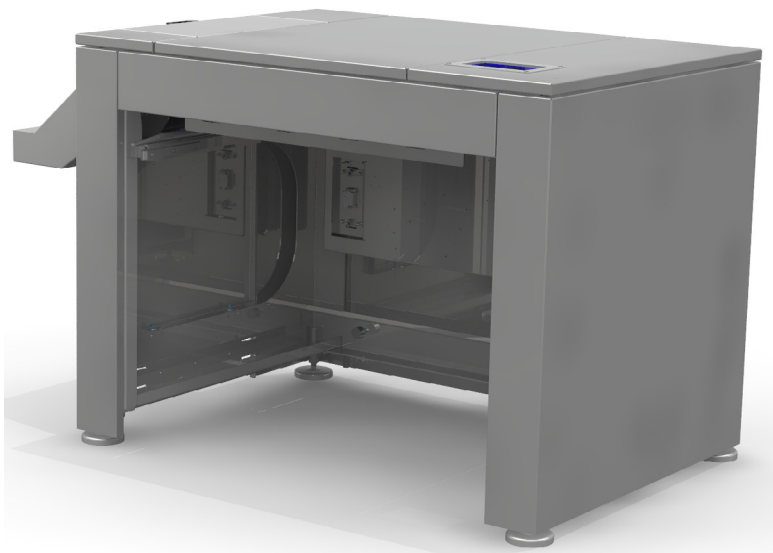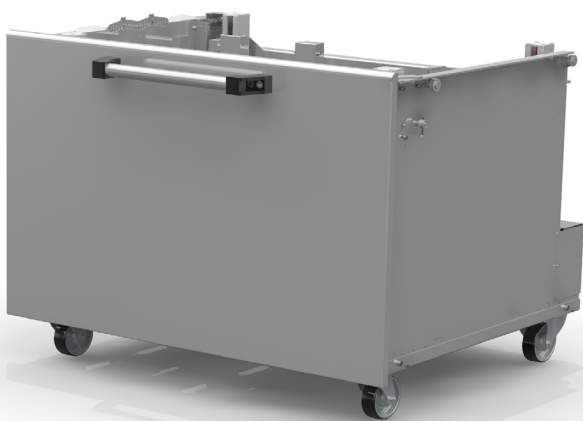



### /// YOUR CONTACT

The BDT Print Media Team is happy to take inquiries and to offer information via

- /// E-mail: [sales.tornado@bdt.de](mailto:sales.tornado@bdt.de)
- /// Phone: +49 (0)741 - 248-269
- /// Fax: +49 (0)741 - 248-149
  
- /// Address: Saline 29 . 78628 Rottweil  
Germany

### /// NOTES